



## HT Duraflo Filter Elements

Material Specifications for Temperature Resistant Filter Elements from Chemflo

### Microfiberglass and Nomex® Duraflo Filter Media

Combining the high efficiency and high dirt holding of our proprietary low-binder Microfiberglass with the temperature resistance of Nomex®. Rated to 400° Fahrenheit.

#### Micron Ratings:

- 1µm Absolute
- 2µm Absolute

### Nomex® Duraflo Filter Media

Temperature resistant Nomex® media filter element designed for process applications up to 400° Fahrenheit.

#### Micron Ratings:

- 25µm Nominal
- 50µm Nominal

### PPS® Duraflo Filter Media

Temperature resistant Polyphenaline Sulfide media filter element designed for process applications up to 350° F.

#### Micron Ratings:

- 25µm Nominal
- 50µm Nominal

#### Product Features:


- Aluminum or Stainless Steel Screen Drainage Layers
- Wide Chemical Compatibility
- High Efficiency and Long Life

#### Configurations Available:

- Double Open End:
  - 2.5" Outside Diameter
  - 3" Outside Diameter
  - 6" Outside Diameter
- Fitting into High Flow Element housings:
  - "740-Style"
  - HF Series
- 1401-Style
- Specialty Configurations Available



**HT Duraflo 1401**

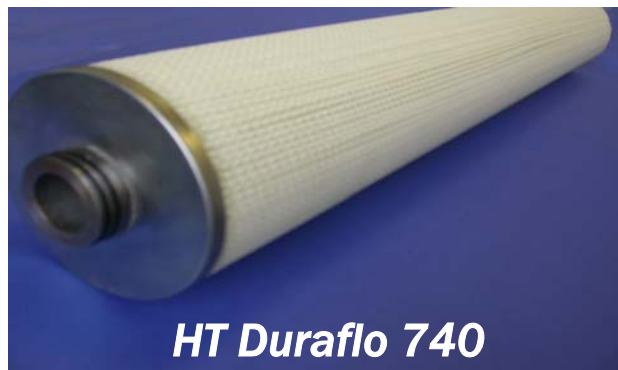

**HT Duraflo 740**

*Efficiencies have been calculated in a laboratory environment using water and ISO Test Dust. Laboratory tests may not represent actual field results. Nomex® is a registered trademark of E.I. du Pont de Nemours and Company.*